
HCV
Door Drive

Electrical door opener



24VDC / 48VDC

Actulux

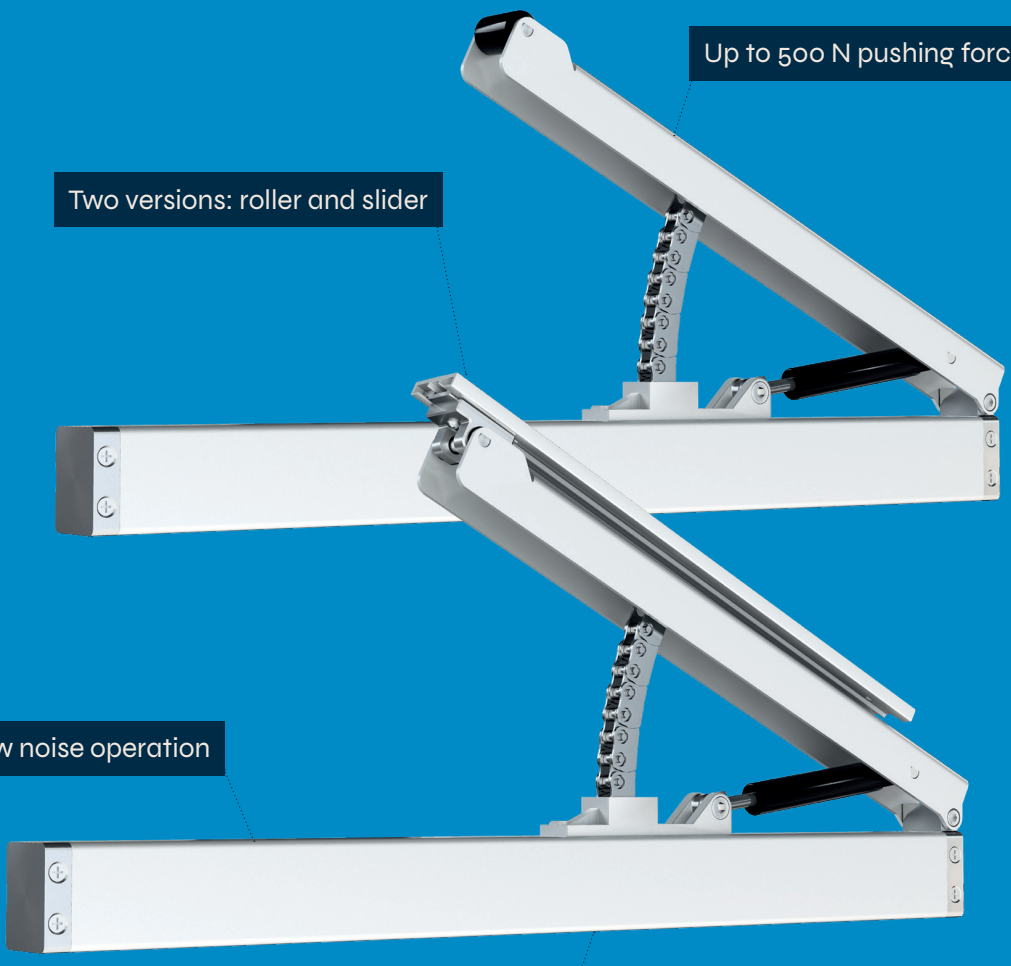



Features

- Elegant and symmetrical design for all types of single and double doors as well as façade windows
- Designed to comply with EN 12101-2
- Integrated electronic overload protection
- Soft-close function ensures reduced closing speed
- Up to 500 N force at chain entrance point
- 2-wire line monitoring
- 2.5 m silicone cable
- Painted aluminium





If you wish to hold the moving part in a specific position, you can use the HCV Door Drive with a slider.

The door drives can be mounted in synchro, for example one at the top and one at the bottom of the door/window.

Power supply	24VDC / 1,4A 48VDC / 0,7A
Pushing/pulling force	500 N / 500 N
Opening angle	up to 100°
Locking pressure	2000 N
Protection	IP32
Temperature	-25°C - +75°C
Speed	Comfort: 7 mm/s Fire: 10 mm/s
Size (mm)	613 x 82 x 41 mm
Colour	Standard colour is RAL 9006 (White aluminium). Other colours available on request.
Item no.	31040100 (roller) / 31040105 (slider)

Actulux A/S Porsborgparken 35 DK-9530 Stoevring +45 98 57 40 90 info@actulux.com actulux.com

23.03.2026

VENTIO by HSL SOLUTIONS Str. Sinaia, Nr. 25-29, Ștefănești de Jos, Jud. Ilfov · contact@ventio.ro · www.ventio.ro · 0762.921.795