Accessories

Actulux




Thermal Differential Detector

detection of fire



Actulux

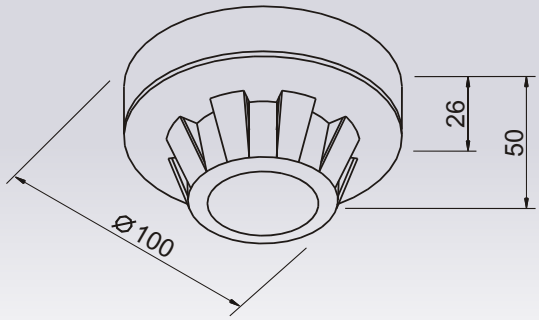


Thermal Differential Detector


THERMAL DIFFERENTIAL DETECTOR FOR FIRE DETECTION

Thermal Differential Detector for early fire detection. Alarm release in case of fast temperature increase and with maximum temperature of approx. 75° C with optical indicator on release, including mounting base.

CABLE OUTLET

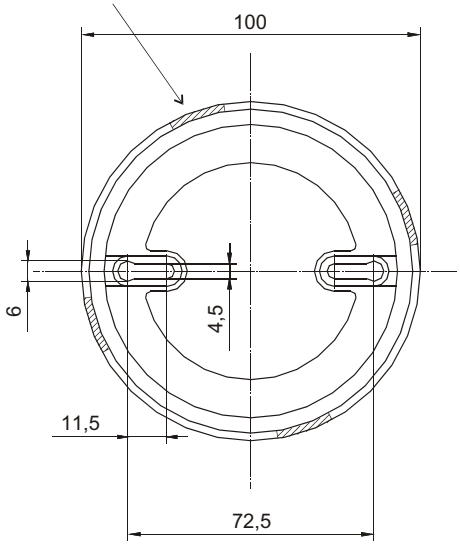

ELECTRICAL CONNECTION

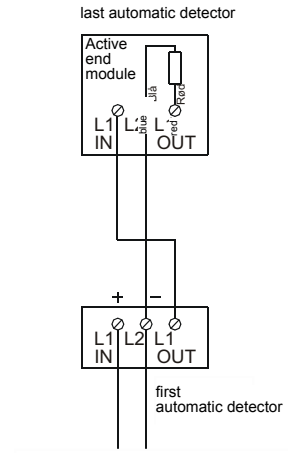

VdS

Approval no.: G200017

FEATURES
Connection voltage: 24VDC
Current consumption (rest): 0.1 mA
Cabinet: White plastic, round
Operating temperature: -20° to 90° C
Trigger point: 75°C
Trigger current: 50mA
Item no.: 111735

Actulux A/S | Haandvaerkervej 2 | DK-9560 Hadsund | Tel: +45 98 57 40 90 | info@actulux.com | www.actulux.com

07.05.2021

VENTIO by hsl SOLUTIONS Str. Sinaia, Nr. 25-29, Ștefănești de Jos, Jud. Ilfov · contact@ventio.ro · www.ventio.ro · 0762.921.795