
Accessories

Actulux

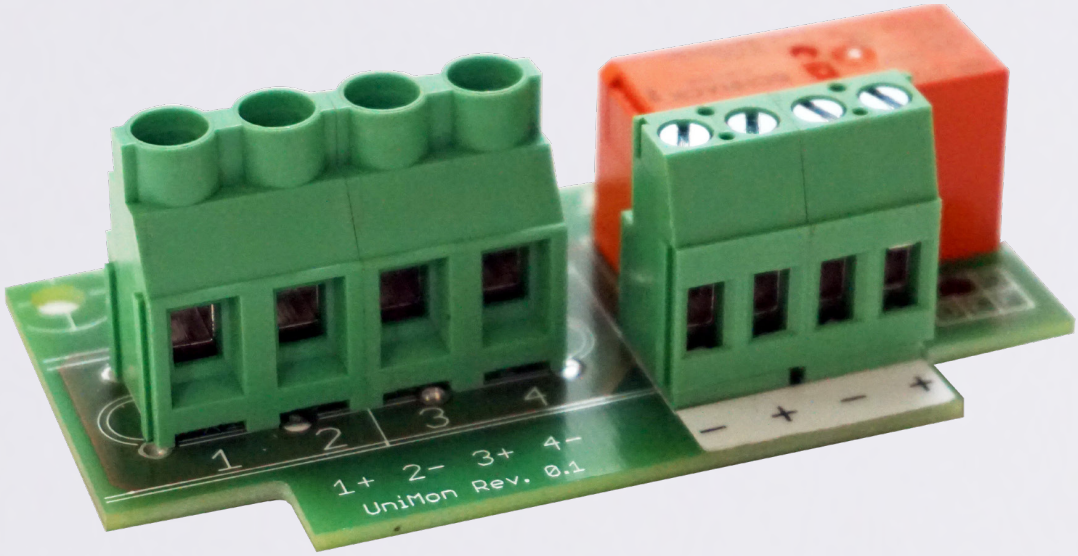


Actulux Universal Line Monitoring

Type **UniMon** for non-Actulux actuators

Actulux



#121030 UniMon 24V S
AP9 junction box (86x86x39mm)
Input terminals: 6mm²

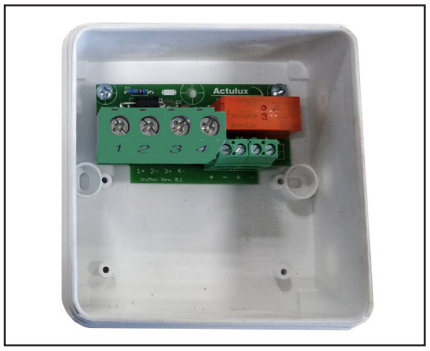


#121031 UniMon 24V L
K2 junction box (105,6x105,6x48,5mm)
Input terminals: 10mm²

ADVANCED ELECTRONIC

UniMon is an advanced Actulux electronic product, used to line monitor non-Actulux actuators with 2 wires only.
UniMon is delivered in a discreet plastic box, which also functions as a link between the supply and the actuators.

Universal Line Monitoring

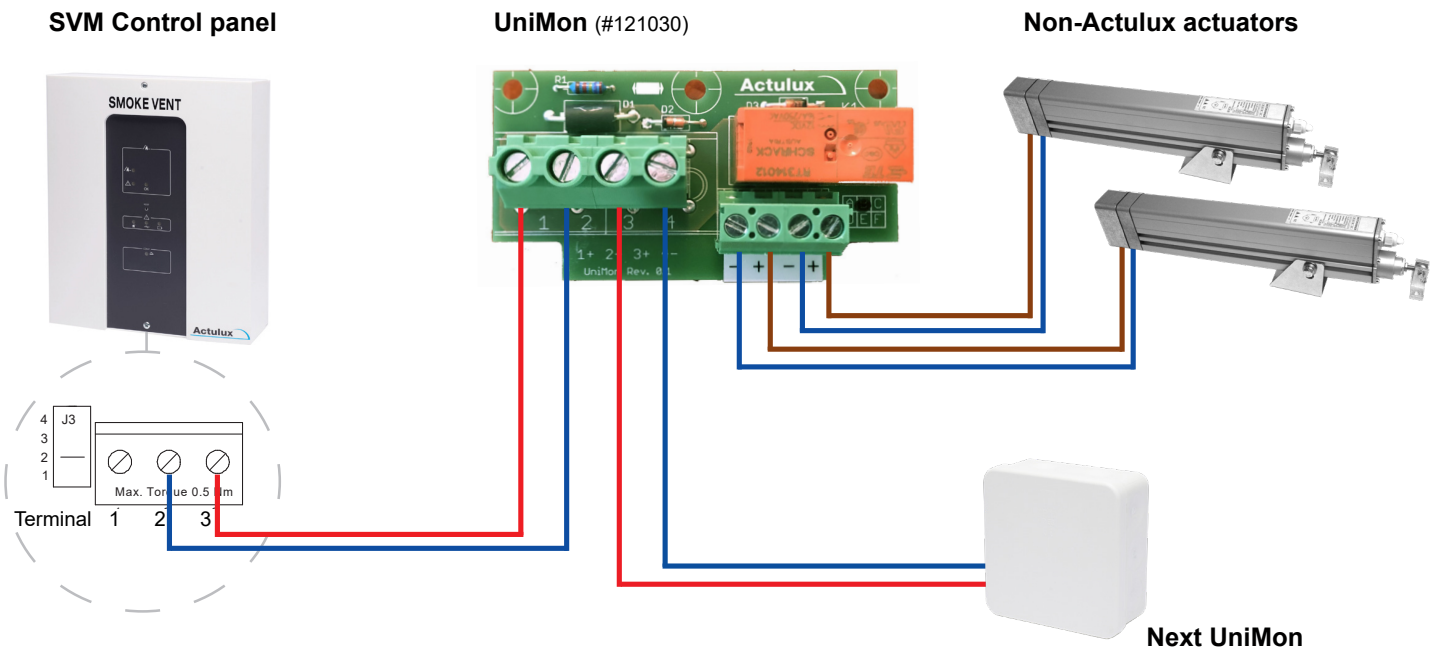

FEATURES
Power supply: 24VDC
Input resistance: 27kΩ
Max 8A total
Size (LxWxH): AP9 (86x86x39mm)
Size (LxWxH): K2 (105,6x105,6x48,5mm)
Material: White plastic box
IP rating: IP54
Silicone cable: Not included
Meets requirements: EN12101-2 / EN60335-1 / EN50130-4 Marking: CE
Product number: 121030 (UniMon 24V S) / 121031 (UniMon 24V L)

Actulux A/S | Haandvaerkervej 2 | DK-9560 Hadsund | Tel.: +45 98 57 40 90 | info@actulux.com | www.actulux.com

25.05.2020

VENTIO by hsl SOLUTIONS Str. Sinaia, Nr. 25-29, Ștefănești de Jos, Jud. Ilfov · contact@ventio.ro · www.ventio.ro · 0762.921.795